



# Over-foil PE Allu 1200

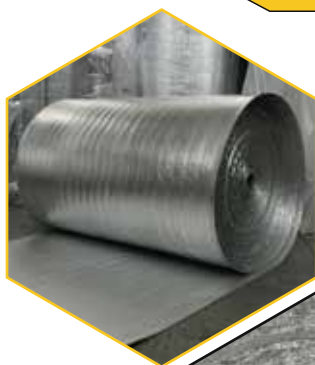

**Over-foil PE ALLU** is a closed-cell, non-cross-linked polyethylene foam material, laminated with a 30 my thick aluminised PE LD film, ideal for creating insulating packaging for perishable products that need to maintain the temperature as constant as possible during transport or storage. Thermal tests during use have shown extremely high efficiency in the field, mainly due to the reflective aluminised film on both sides of the product. Its lightness and strength allow for multiple uses, and in fact Over-foil PE ALLU is the base material for both the thermal insulation kit for **Reflex-pallet** and the thermal insulation kit for 20' or 40' **Reflex-Kit containers**.

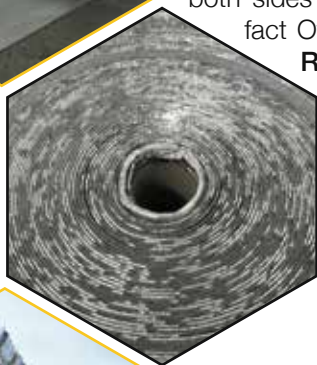


## MAIN FEATURES

High efficiency thanks to the reflective aluminium film on both sides.

Lightweight and durable.

Excellent barrier against moisture and vapour.

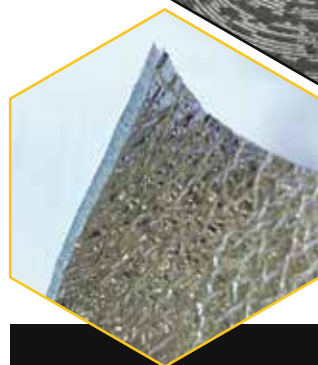

## TECHNICAL SPECIFICATIONS

|                    |                      |
|--------------------|----------------------|
| Material thickness | approx. 4 mm         |
| Colour             | aluminium            |
| Roll height        | 120 cm               |
| Roll length        | 175 m                |
| Roll width         | 210 m <sup>2</sup>   |
| Weight             | 120 g/m <sup>2</sup> |

## Compliance with EU Directives

Directive 94/62/EC of the European Parliament and of the Council of 20 December 1994 on packaging and packaging waste (and subsequent amendments).

Directive 2011/65/EC of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (recast of Directive 2002/95/EC, RoHS).

Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006 concerning the registration, evaluation, authorization and restriction of chemicals (REACH). Register of substances updated on 19 December 2012.